

4th International Short Conference/Course on
APPLIED COASTAL RESEARCH
Honouring Professor Hans F. Burchard



15th - 17th June, 2009

LIM - Universitat Politècnica de Catalunya (UPC)
Spain


PROCEEDINGS

Edited by

Agustin Sanchez Arcilla

and

Giuseppe Roberto Tomasicchio

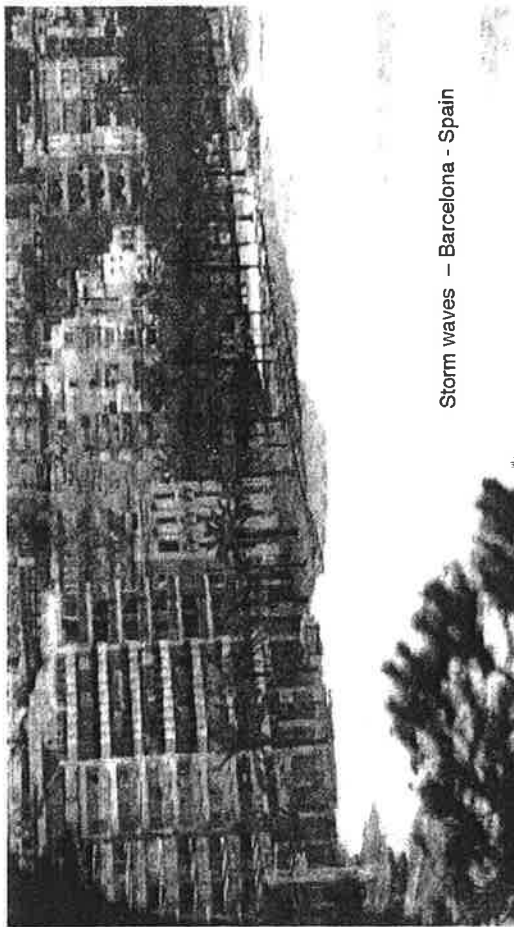



Storm waves - Barcelona - Spain



UNIVERSITÀ DEL SALENTO

Coastal Engineering





International Association of Hydro-Environment Engineering & Research

4th International Short Conference/Course on *APPLIED COASTAL RESEARCH*

Honouring Professor Hans F. Burchardt

PROCEEDINGS

SPONSORED BY
The International Association of Hydraulic Engineering & Research

EDITED BY
prof. Agustín Sánchez Arcilla
and
prof. Giuseppe Roberto Tomasicchio

15th -17th of June, 2009
LIM - Universitat Politècnica de Catalunya (UPC), Spain



Università del Salento
DIPARTIMENTO DI INGEGNERIA DELL'INNOVAZIONE



Laboratori d'Enginyeria Marítima
UNIVERSITAT POLITÈCNICA DE CATALUNYA



CIIRC
International Centre
for Coastal Resources
Research



Escola Tècnica Superior d'Enginyeria
de Camins, Canals i Ports de Barcelona



UNIVERSITAT POLITÈCNICA DE CATALUNYA

NUOVA BIOS

ISBN 978-88-6093-069-9

The 4th International Short Conference/Course on APPLIED COASTAL RESEARCH is sponsored by IAHR, the Engineering Dept. at University of Salerno, the Laboratori d'Ingegneria Marittima of the Università Politecnica de Catalunya (UPC), and the International Centre for Coastal Resources Research (UPC).

All the papers included in the proceedings were selected for presentation at the 4th SCACR. The Volume was produced from camera ready typescripts submitted by the authors.

IAHR COUNCIL

President
Prof. Nobuyuki Tamai

Vice-Presidents
Dr. Jean Paul Chabard
Prof. Peter Goodwin
Prof. J. H. W. Lee

Secretary General
Dr. Ramón M. Gutiérrez Serret

Members
Prof. António H. Cardoso
Prof. Philippe Gourbesville
Prof. Reinhard Hinkelmann
Prof. Bruce Melville
Dr. Marian Muste
Dr. Jaime Ordóñez
Prof. Changkuan Zhang
Prof. Panayotis Prinos

Co-opted Council members
Prof. T. Kojiri
Prof. Dr. Ir. A.E. Mynett

Committee on Coastal and Maritime Hydraulics

Chairman
Constatine Memos

Vice Chairman
Francisco Taveira Pinto

Members
Prof. S. L. Huang
Prof. Gary P. Macke
Prof. Panayotis Prinos
Prof. Songdong Shao
Prof. E.h. V. Sundar
Prof. Hitoshi Tanaka
Prof. Damien Vialeau
Prof. Pengzhi Lin
Prof. See-Whan Kang

Printing of the 4th SCACR Proceedings was sponsored by

Valerio General Costruzioni s.r.l.

Sede Legale
Via delle Crociate, 43
70059 Trani (BAT)

<http://www.valeriogeneralcostruzioni.it>



Cover: storm waves in Barceloneta

© Nuova Editoriale Bios
Via A. Rendano 25 - 87940 Castrolibero
Tel. 0984 854512 - Fax 0984 854038
www.edlibios.it info@edlibios.it

All rights reserved

Honouring Professor Hans F. Burcharth, University of Aalborg, Denmark

Chairmen and Secretaries

prof. Agustín Sánchez-Arcilla, LIM - Universitat Politècnica de Catalunya, Spain
prof. G.R. Tomasicchio, University of Salento, Italy

Organizing Committee

dr. F. D'Alessandro, University of Salento
dr. F. Frega, University of Calabria
dr. R. Gencarelli, University of Calabria

Advisory Committee

prof. K.A. Al-Banadi, Kuwait Institute for Scientific Research, Kuwait
prof. P. Amini, University of Florence, Italy
prof. F. Arena, Mediterranean University, Italy
prof. G. Barbaro, Mediterranean University
prof. D.R. Basco, Old Dominion University, USA
prof. H. F. Burcharth, Aalborg University, Denmark
prof. M. Brocchini, Polytechnic University of Marche, Italy
prof. M. Calabrese, University of Naples, Italy
prof. L. Damiani, Polytechnic of Bari, Italy
prof. R. G. Dean, University of Florida, USA
prof. P. De Girolamo, University of L'Aquila, Italy
prof. N. Kobayashi, University of Delaware, USA
dr. A. Kortenhaus, Leichtweiß-Institut für Hydraulik, Germany
prof. L. Franco, University of Rome III, Italy
prof. A. Lamberti, University of Bologna, Italy
prof. I.J. Losada, University of Cantabria, Spain
prof. A. Mancinelli, Polytechnic University of Marche, Italy
dr. J. Melby, US Army Corps of Engineers, USA
prof. A. F. Petrillo, Polytechnic of Bari, Italy
prof. E. Pugliese Carratelli, University of Calabria, Italy
prof. P. Pinos, Aristotle University of Thessaloniki, Greece
prof. P. Ruol, University of Padova, Italy
prof. A. Sánchez-Arcilla, LIM-UPC, Spain
prof. F. Sancho, LNEC, Portugal
dr. H. Schüttrumpf, RWTH Aachen, Germany
dr. K. Srimasako, Port and Airport Research Institute, Japan
dr. P. Sloth, Danish Hydraulic Institute, Denmark
dr. B. M. Sumer, Technical University of Denmark, Denmark
prof. V. Sundar, IIT of Madras, India
dr. J.W. van der Meer, Infram, The Netherlands
prof. P. Veltri, University of Calabria
dr. D. Vicinanza, 2nd University of Naples, Italy

FOREWORD

The International Short Conference and course on Applied Coastal Research (SCACR) is a technical conference series focusing on research issues related to harbour and coastal engineering and dynamics and bringing together students and top level researchers and practitioners. It is, therefore, of interest for PhD students, field and laboratory experimentalists, theoreticians and modellers, all of them with an interest on the physical processes driving water and sediment fluxes in the coastal zone and their interactions with the structures and ecosystems.

The 4th SCACR was hosted by LIM/UPC in Barcelona in June 2009. It covered state of the art formulations, numerical simulations (both classical and using advanced techniques such as SPH), physical experiments in the laboratory (both large and small scales) and field campaigns, etc.

We were fortunate to have invited speakers such as Prof. Marcel Stive, Dr. Jeff A. Melby and Professor Holger Schuettrumpf, together with a large group of invited specialists and engineers.

The conference was dedicated to honour the contributions of Prof. Hans. F. Burcharth from Aalborg University (DK) in the field of Coastal and Harbour Engineering, acknowledging his contributions to teaching, research and engineering applications in this field.

The conference had a participation of 95 people from Europe and overseas. Although every effort was made to keep the registration fee low, some researchers from 3rd world countries showed their interest but had difficulties in joining the conference for a variety of reasons (visas, travel costs, etc.).

The conference had the support of IAHR, Universitat del Salento, ETSE de Camins, Canals i Ports de Barcelona, UPC and CIIRC.

We want also to acknowledge the various sponsors and technical exhibitors. Due mention should also be made of the enthusiastic support of LIM and CIIRC staff who made possible and successful this event.

We want to thank as well the Sessions Chairmen and other support staff.

This successful 4th SCACR prepares the way for organizing future conference editions which will bring together in such a symbiotic manner young and experienced researchers and engineers, interested in coastal and harbour problems.

The 5th edition will be held in Germany at Lehrstuhl und Institut fuer Wasserbau und Wasserwirtschaft, RWTH, Aachen in June 2011.

Then, see You in Germany in June 2011.

Agustín Sánchez-Arcilla and Roberto Tomasicchio

TABLE OF CONTENTS / TABLE DES MATIÈRES

	Page	7
FOREWORD		
<u>LECTIO MAGISTRALIS</u>		
CHOICE OF BREAKWATER TYPE AND OPTIMUM SAFETY LEVELS H. F. Burcharth	“	19
<u>LECTURES</u>		
EXTREME WAVE EVENTS. APPLICATIONS TO BREAKWATER ENGINEERING A. Sánchez-Arcilla, V. Gracia, M. Alomar, X. Gironella, J. Gómez,	“	33
TIME DEPENDENT LIFE-CYCLE ANALYSIS OF BREAKWATERS J. A. Melby	“	46
WAVE OVERTOPPING DESIGN FOR SEADIKES IN GERMANY H. Schüttrumpf	“	64
<u>PROCEEDINGS OF THE TECHNICAL SESSIONS</u>		
Technical Session 1: SEDIMENT AND COASTAL DYNAMICS (Chairman: prof. Jose A. Jiménez, LIM/UPC)	“	83
NON-INVASIVE 3D MEASUREMENTS OF SANDY BOTTOM EVOLUTION: AN APPLICATION TO SWASH ZONE MORPHODYNAMICS A. Marini, R. E. Musumeci, L. M. Stancanelli, E. Foti	“	95
DUNE EROSION AND OVERWASH DURING A STORM F. D'Alessandro, F. Frega, G. R. Tomasichio	“	105
QUANTITATIVE VALIDATION OF A PROBABILISTIC MORPHOLOGICAL MODEL D. Villarroel-Lamb	“	114
IMPOUNDMENT TECHNIQUE TO CALIBRATE LST RATE FORMULA ON A MIXED BEACH I. Martín-Grandes, D. J. Simmonds, D. E. Reeve	“	120
STORM-INDUCED DYNAMICS AND ITS MANAGEMENT IMPLICATIONS ON A MACROTIDAL GRAVEL BEACH A. Ruiz de Alegria-Arzaburu, G. Masselink	“	120

ANALYSIS OF COASTAL DEFORMATION BY WIND GENERATED WAVES M. C. Martino, G. Barbaro, G. Malara	Page 130	EFFECTS OF POSIDONIA OCEANICA MEADOW ON WAVE PROPAGATION: LARGE-SCALE EXPERIMENTS V. Stratigaki, E. Manca, P. Prinos	Page 230
MORPHOLOGY OF THE SALIENT OF SU GIUDEU BEACH (SARDINIA, ITALY) AND HYDRODYNAMIC ALONG THE SHORELINE A. Atzeni, A. Sulis	141	NUMERICAL SIMULATION OF NEAR-SHORE WAVE BREAKING USING SPH METHOD C. V. Makris, C. D. Memos, Y. N. Krestenitis	241
FIRST STEPS IN THE IMPLEMENTATION OF A SEDIMENT TRANSPORT MODEL IN THE EBRO DELTA CONTINENTAL SHELF J. Fernández, G. Jordá, V. Gracia, M. Espino, A. Sánchez-Arcilla	153	TREND ANALYSIS OF THE SEA LEVEL AND WAVE STORMINESS IN THE CATALAN COAST M. Casas Prat, J. P. Sierra, C. Mösso, A. Sánchez-Arcilla	253
Technical Session 2: WAVES AND HYDRODYNAMICS (Chairman: prof. Jose Pau Sierra, LIM/UPC)		VIBRATIONS OF A HORIZONTAL DECK DUE TO FREAK WAVE ATTACK W. Sulisz, M. Paprota	265
INFLUENCE OF BATHYMETRIC CHANGES ON THE RIA DE AVEIRO HYDRODYNAMICS A. Picado, J. M. Dias, A. B. Fortunato	167	COMPARISON BETWEEN OPENMP AND MPI BASED WAM CYCLE 4.5 S. Moghimi, H. R. Qaieene	272
TIDAL AND RESIDUAL CIRCULATION IN THE RIA FORMOSA (PORTUGAL) M. Sousa, J. M. Dias	179	COMPOSITE MODELLING METHODOLOGY FOR THE SIMULATION OF WAVE PROPAGATION REACHING COASTAL DEFENCES. PRELIMINARY APPLICATION C. J. Fortes, M. G. Neves, J. A. Santos, R. Lemos	278
SATELLITE ALTIMETER CALIBRATION OF A WAVE MODEL IN ARABIAN GULF A. Al Ragum, F. Reale, E. Pugliese Carratelli, K. A. Rakha, C. C. Giarrusso	188	ON MODELING NONLINEAR WAVE INTERACTION WITH COASTAL STRUCTURES J. Zang, D. Ning, Y. Tao	290
EFFECTS OF BOTTOM TOPOGRAPHY CHARACTERISTICS ON TRANSFORMATIONS OF LONG PERIOD SWELL H. Kashima, K. Hirayama	197	Technical Session 4: STRUCTURES AND INTERACTIONS (Chairman: prof. Eugenio Pugliese Carratelli, University of Salerno)	
USE OF REVERSE NUMERICAL MODELING IN FORECASTING THE CONTAMINATION HAZARD OF OIL SPILL AGAINST COASTAL FACILITIES W. E. Elshorbagy, A. A. Elhakeem	206	EXPERIMENTAL RESEARCH ON PORE PRESSURE ATTENUATION IN A RUBBLE MOUND BREAKWATER D. Vanneste, P. Troch	299
Technical Session 3: WAVES AND HYDRODYNAMICS (Chairman: prof. Manuel Espino, LIM/UPC)		EXPERIMENTAL TESTS ON SANDY BEACH MODEL PROTECTED BY LOW-CRESTED STRUCTURES C. Lorenzoni, A. Mancinelli, M. Postacchini, M. Mattioli, L. Soldini, S. Corvaro	310
SPATIAL AND TEMPORAL VARIATIONS IN STORM-RELATED COASTAL HAZARDS IN THE CATALAN COAST E. Bosom, J. A. Jiménez	219	LABORATORY TESTS ON A COASTAL PROTECTION PROJECT IN ASPRA (ITALY) R. Tomasicchio, M. Calabrese, P. Di Pace, M. Buccino, E. Ciralli, A. Argenziano	323

REDUCTION OF WAVE OVERTOPPING:
FROM RESEARCH TO PRACTICE

K. Van Doorslaer, J. De Rouck, S. Gysens

CONSEQUENCES OF A DETACHED BREAKWATER
ON THE MORPHOLOGICAL RESPONSE TO STORMS
OF LA BARCELONETA BEACH (BARCELONA, SPAIN).

A. Sancho, J. Guillén, E. Ojeda

LABORATORY MEASUREMENTS OF WAVE OVERTOPPING
AT PLAIN VERTICAL WALL BREAKWATERS
IN PRESENCE OF AN OVERSPILL STILLING BASIN

I. Crema, L. Cappietti, P. L. Aminti

FLOWDIKE INVESTIGATING THE EFFECT OF WIND
AND CURRENT ON WAVE RUN-UP AND WAVE OVERTOPPING

**A. Brüning, S. Gilli, S. Lorke, R. Pohl, F. Schlitter, M. Spano,
J. van der Meer, S. Werk, H. Schüttrumpf**

STABILITY OF BERM BREAKWATERS FOR DEEP WATER

M. N. Moghim, A. Tørum, Ø. A. Arntsen, B. Brørs

SUBMERGED BREAKWATER AS A NON LINEAR DEVICE:
EXPERIMENTAL INVESTIGATION

F. Ciardulli, M. Buccino, M. Calabrese

PROGRAMME

Monday 15th June 2009

Registration

15:30 – 16:00
16:00 – 16:15

Opening and Welcome address

Agustín Sánchez Arilla, UPC

Roberto Tomasiacchio, University of Salerno

Lecture 1: "Changing Coastal Environment"
by Marcel Stive, T.U.Delft, The Netherlands

Coffee Break

17:30 – 18:00

Technical Session 1

Chairman: Jose A. Jiménez (UPC)

18:00 – 20:00

Tuesday 16th June 2009

Lecture 2A: "Design of coastal structures"

by Jeff A. Melby, USA CE, USA

9:30 – 10:45

Coffee Break

10:45 – 11:15

Lecture 2B: "Design of coastal structures"

by Jeff A. Melby, USA CE, USA

11:15 – 12:45

Lunch Break

13:00 – 14:30

Lectio Magistralis

"Breakwater engineering"

by professor Hans F. Burchard, Aalborg University, Denmark

4:30 – 16:00

Coffee Break

16:00 – 16:30

16:30 – 18:30 Invited speakers for Specialist Session

16:50- 6:50 Extreme wave events (Agustín Sánchez-Arcilla - UPC)
16:50-17:10 Deterministic formulations, transmission, reflection and overtopping (Xavier Gironella - UPC)

17:10-17:30 Probabilistic breakwater design (César Vidal - Univ. Cantabria)

17:30-17:50 Instrumented breakwaters: The Barcelona harbour case (Javier Úzcanga - Puerto Barcelona)

17:50-18:10 The design and construction of large breakwater. The Coruña harbour case (Enrique Maciñeira - Puerto La Coruña)

20:45 Social Dinner

Wednesday 17th June 2009

9:30 – 10:45

Lecture 3A: "Overtopping modelling"

Holger Schuettrumpf, Institute of Hydraulic Engineering and Water Resources of RWTH Aachen, Germany

Coffee Break

10:45 – 11:15

Lecture 3B: "Overtopping modelling"

Holger Schuettrumpf

11:15 – 12:15

Lunch Break

13:00 – 14:30

Technical Session 2

Chairman: Eugenio Pugliese Carratelli, University of Salerno, Italy

14:45 – 16:45

Discussion and Closing

17:00

Page 337

“ 347

“ 353

“ 361

“ 373

“ 385

Dean, R. J., Chen, R. And Browder, A. E., 1997. 'Full Scale Monitoring Study of a Submerged Breakwater, Palm Beach, Florida, USA'. Coastal Engineering, vol. 29, pp. 291-315.

Tanaka, N., 1976. 'Effects of Submerged Rubble-mound Breakwater on Wave Attenuation and Shoreline stabilization' (in Japanese). Proc. of 23rd Japanese Coastal Engineering Conference. pp. 152-157.

4th International Short Conference/Course on Applied Coastal Research 15th -17th June, 2009 - LIM - Universitat Politècnica de Catalunya (UPC), Spain ©Nuova Editoriale Bios

REDUCTION OF WAVE OVERTOPPING: FROM RESEARCH TO PRACTICE

Koen Van Doorslaer¹, Julien De Rouck¹ and Stefaan Gysens²

Abstract: The present paper shows the purpose, the test results and the practical implementation of two innovative crest designs, based on scale model test with mainly non-breaking waves. First, the parapet and its geometrical parameters are shown. Second, the reduction of a dike with stilling wave basin is presented. Both crest designs will be built along the Belgian coast in order to fulfill current and anticipate future safety norms. Alternatives and/or performance are discussed within the present paper.

INTRODUCTION

To ensure the safety in Belgian coastal regions now and in the future (up to 2050, including the sea level rise) a Coastal Safety Plan³ is being worked out, in which is declared that cities near the coastline have to be protected against storms with a return period of 1000 year (which is a minimal acceptable protection level). If this storm would appear now, theoretical and physical models have shown that the safety of one third of the Belgian coastal zone is insufficient. Such a storm may create breaches causing flooding of the hinterland with an economical damage of billions of Euros and the risk of life of at least 4000 people.

A beach nourishment is an option to increase the safety against these severe storms, but is not always possible close to harbors, may be very expensive since constant monitoring and restoration will be necessary during its lifetime, and are also limited to a certain level. Another safety measurement could be the heightening of the dikes, but this is often restricted because of its inconveniences; the visual attraction of the open sea can not be lost, apartments and promenades near the coastline have to remain untouched, ... A sound practical solution is needed within the spatial restrictions and dealing with the architectural desire of a touristic area.

¹Ghent University, Department of Civil Engineering, Technologiepark 904, B-9052 Zwijnaarde, Belgium -Koen.VanDoorslaer@UGent.be - Julien.DeRouck@UGent.be

²Ministry of the Flemish Community, Coastal Division, Vrijhavenstraat 3, B-8400 Oostende, Belgium -Stefaan.Gysens@unow.vlaanderen.be

³<http://zeeweringenkustbeheer.afdelingkust.be/>



Fig. 1. Overtopping in Oostende, Belgium

Therefore innovative crest designs, with a significant reduction of wave overtopping but without heightening the crest level, are studied at Ghent University. Two of those designs and their practical use are discussed in this paper: the Parapet and the Stilling Wave Basin (SWB). Model tests have been carried out and prototypes will be built along the dikes of some coastal cities such as Oostende, Wenduine, Middelkerke, Nieuwpoort. This paper shows how research can lead to sound practical solutions.

EXPERIMENTEL SET-UP

Test Facility and Wave Generation

Model tests on wave overtopping were performed in the wave flume ($L \times W \times H = 30.0\text{m} \times 1.0\text{m} \times 1.2\text{m}$) of the Department of Civil Engineering at Ghent University. In this flume waves are generated using a piston type paddle. The wave paddle steering features active wave absorption based on Frigaard and Brorsen (1995) as mentioned in Troch and De Rouck (1999). Waves were generated using the standard Pierson-Moskowitz spectra. The length of the tested time series was chosen to represent approximately 1000 waves in order to obtain reliable average overtopping discharges.

Measurements

Waves are measured using resistance type wave gauges. Incident wave conditions are determined using the method by Mansard and Funke (1981). Wave overtopping amounts were determined by weighing overtopping volumes.

THEORETICAL FORMULAS

Results are presented using the van der Meer approach as presented in TAW (2002). In this formulas, a distinction between breaking and non breaking waves is made using the Irribaren number ξ_0 . The formula for breaking waves is

$$\frac{q}{\sqrt{g \cdot H_{m0}^3}} = \frac{0.067}{\sqrt{\tan \alpha}} \cdot \gamma_b \cdot \xi_0 \cdot \exp\left(-4.75 \cdot \frac{R_c}{H_{m0}} \cdot \frac{1}{\xi_0 \cdot \gamma_b \cdot \gamma_f \cdot \gamma_\beta \cdot \gamma_v}\right) \quad (1)$$

with a maximum for non-breaking waves

$$\frac{q}{\sqrt{g \cdot H_{m0}^3}} = 0.2 \cdot \exp\left(-2.6 \cdot \frac{R_c}{H_{m0}} \cdot \frac{1}{\gamma_f \cdot \gamma_\beta}\right) \quad (2)$$

where q = overtopping discharge, g = gravity acceleration, H_{m0} = the wave height at the toe of the structure, α = the average slope of the structure, $\xi_0 = \tan \alpha / \sqrt{s_0}$ = wave breaker parameter, $s_0 = H_{m0}/L_0$ = wave steepness, $L_0 = g \cdot T_{m-1,0}^2 / (2\pi)$ = deep water wave length, $T_{m-1,0}$ = spectral wave period at the toe of the structure, γ = reduction factor (indices: b = berm, f = roughness, β = wave angle, v = vertical wall). Remark that \square stands for the average slope, meaning that any vertical wall or other structure on the slope is included in the definition of the average slope as presented in TAW (2002).

Both formulas represent the dimensionless overtopping rate on the left side as to be an exponential function of the dimensionless freeboard. In this research a smooth dike without berm ($\gamma_f = 1$, $\gamma_b = 1$) is constructed in a 2D wave flume ($\gamma_h = 1$). The goal is to find reduction factors $\gamma_{parapet}$ and γ_{SWB} . This will be discussed in the next chapters. Mainly non-breaking waves have been used, and only some breaking waves for a first comparison between both. But the focus of this research topic was to find the reduction factor s in the non-breaking formula (2).

DIKE WITH PARAPET

Basic Geometry

A parapet, or wave return wall, can be built on the slope of a dike. A simple return wall can be built (left on Fig. 2), but it is advisable to fill up the space and create a wider dike as shown right on Fig. 2. One of its main characteristics is the crest level, which remains as high (low) as the initial dike.



Fig. 2. Possible lay-outs of a parapet

Nevertheless, a major reduction of overtopping is expected. This is realized by projecting the incoming waves back towards the open sea, as shown in Fig. 3.



Fig. 3. Seaward projection of overtopping waves due to a parapet

During this research next geometrical variables have been changed: the angle β , the total height of the parapet and the ratio of the heights $\lambda = h_p/h_v$.

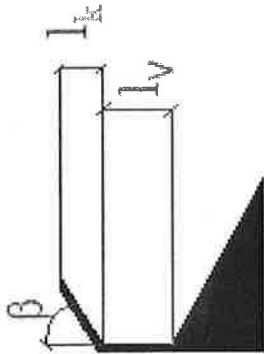


Fig. 4. Variable parameters β and λ .

Test conditions

Table 1. Test Conditions For The Dike With Parapet, Scale Model Values

Wave Parameters		
Significant wave height at toe of structure (H_{m0})	[m]	0.07 - 0.14
Peak wave period at toe of structure (T_p)	[s]	1.2 - 2.6
Wave steepness (s_0)	[-]	0.013 - 0.043
Structural parameters		
Water depth at the toe of the structure (d)	[m]	0.44 - 0.57
Freeboard (R_c)	[m]	0.18 - 0.05
Dimensionless freeboard (R_c/H_{m0})	[-]	2.57 - 0.64
Slope of the structure (α)	[-]	1/2
Parapet parameters		
Angle (β)	[-]	0°; 15°; 30°; 45°;
Inclined height (l_k)	[m]	60°
Total height of the parapet (l)	[m]	0.01; 0.02; 0.03 0.02; 0.05; 0.08

It should be noticed that wave height is rather small compared to the water depth. This to avoid depth limited wave breaking in front of the structure.

Results

Test results have shown that the parapet has the biggest reduction in overtopping for $\beta \geq 45^\circ$. The profit by increasing this angle beyond 45° is rather small (Fig. 5). A similar analysis is done for the height ratio λ . It is found that the reduction on wave overtopping is maximal for $\lambda \geq 0.33$ (Fig. 6). These conclusions are only valid for the tested parapet heights of 5cm and 8cm, where $h_{parapet}/H_{m0} > 0.3$. In case $h_{parapet}/H_{m0}$ is smaller than 0.3, more tests are needed to draw a conclusion.

Fig. 5 and Fig. 6 are the graphs of the reduction factor as a function of its geometrical variable, plotted for the parapet of 5cm high. The 8cm high parapet shows similar results.

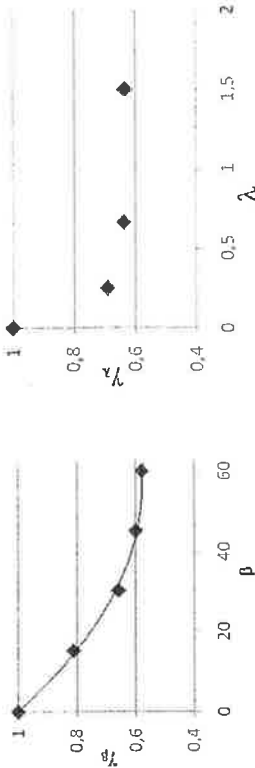


Fig. 5. Influence of β on the reduction of overtopping (graph: parapet of 5cm height)

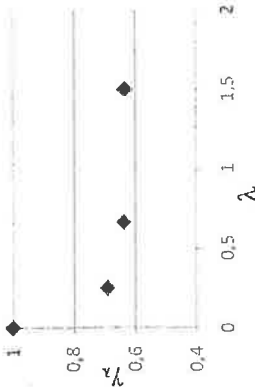


Fig. 6. Influence of λ on the reduction of overtopping (graph: parapet of 5cm height)

The reduction in wave overtopping over a dike with a vertical wall with a certain height h_{wall} is referred to the overtopping on a dike without vertical wall (but the same freeboard). This reference case is then defined as a wall with $h_{wall} = 0\text{cm}$. The reduction factor γ_v to be added to (2) is 0.93 in case $h_{wall}/H_{m0} < 0.6$ and 0.9 otherwise.

Similar, to compare the wave overtopping over a dike with parapet, one should refer to a dike with a vertical wall (with the same freeboard). This reference case is defined as a parapet with $\beta = \lambda = 0$. The reduction factor $\gamma_{parapet}$ to be added to (2) has a minimal value of 0.557 (in case $\beta \geq 45^\circ$ and $\lambda \geq 0.33$).

The total reduction factor of a dike with parapet compared to a simple dike, then becomes the minimal value of 0.5.

Practical use

In Nieuwpoort, Belgium, the current borderline between the walking promenade and the beach is a 1/2 smooth dike. In stormy weather, the sea level will rise until it reaches the smooth dike. On Fig. 7 it is to be seen that an open railing is built as a fence between promenade and smooth dike. This does not prevent the water to flood over the promenade into the city. This open railing (height 0.5m above the promenade) can be changed into a parapet with $\beta = 45^\circ$ and $\lambda = 1/3$ as shown on Fig. 8.

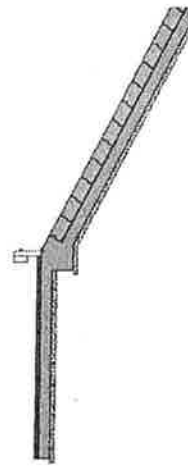


Fig. 7. Current dike with open railing




Fig. 8. Solution with parapet

In Table 2, the theoretical reduction factors are calculated for a storm with increasing return period. The promenade in Fig. 7 and Fig. 8 is situated at level +7.82m TAW, while the sea level is located between +6mTAW and +7.3mTAW.

Table 2. Reduction factors of a parapet in storm conditions

Return period (year)	sea level rise	water level (m IAW)	R_C/H_{m0} (-)	$H_{A,design}$ (m)	q (open railing) (l/s.m)	q (parapet) (l/s.m)	reduction factor (-)
1000	yes	7.3	0.51	2	877	129	6.8
	no	7	0.66	2	584	60	9.8
100	yes	6.8	0.84	1.8	326	20	16.5
	no	6.5	1.01	1.8	208	8	24.7
10	yes	6.3	1.26	1.6	97	1.6	62
	no	6	1.45	1.6	58	0.6	101

A major reduction, up to 100 times the overtopping discharge, can be obtained by a little adaptation in the existing construction in Nieuwpoort. According to the Belgian Coastal Safety Plan, the overtopping discharge should be reduced to an average of 1 l/s.m. A storm wall can be built behind the parapet, as shown in Fig. 9. Due to the parapet, this storm wall should only be setup once every 10 or more years, but it is advisable to test the storm procedure and placements of the wall once a year during a lower storm flood warning, to minimize the risk of failure and as a training.

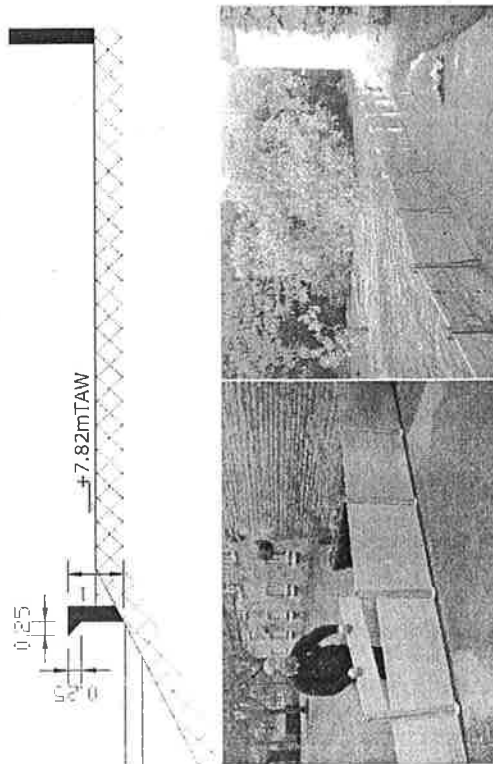


Fig. 9. Installation of a storm wall in case $q > 1\text{l/s.m}$

DIKE WITH STILLING WAVE BASIN

Basic Geometry

As presented on ICCE 2006 in San Diego by Geeraerts, De Rouck et al. (2006), a stilling wave basin is made up of a vertical seaward wall, a basin and a 2nd landward wall. Waves hitting the seaward wall are projected upward and "drop dead" in the basin and lose their energy. Since the seaward wall is actually a double row of shifted walls, the evacuation of the overtopped water is possible. In case of large overtopping, the

water runs back and forth the basin between the seaward and the landward wall, meanwhile losing its energy. The remaining energy is insufficient to overtop the landward wall. An important parameter in this SWB is the blocking coefficient, which is the ratio between the open and the closed part of both rows of shifted walls. The optimum between inflow (as low as possible) and outflow (as high as possible) needs to be found.

Similar to the parapet, the crest freeboard does not become higher.



Fig. 10. Principle sketch of a SWB (right) versus the normal dike (left)

Depending on the existing situation, the promenade can be seen as the basin, but a stilling wave basin can also be built in front of the existing promenade. In this last case, the dike is extended towards the sea.

Test Conditions

Table 3. Test conditions for the dike with SWB

Wave Parameters		
Significant wave height at toe of structure (H_{m0})	[m]	0.08 - 0.18
Peak wave period at toe of structure (T_p)	[s]	1.28 - 2.56
Wave steepness (S_0)	-	0.012 - 0.054
Structural parameters		
water depth at the toe of the structure (d)	[m]	0.30 - 0.52
Freeboard (R_C)	[m]	0.10 - 0.27
Dimensionless freeboard (R_C/H_{m0})	-	0.555 - 3.375
Slope of the structure (α)	-	1/2; 1/2.5; 1/3; 1/4; 1/6
SWB parameters		
height	[m]	0.096
length	[m]	0.480
blocking coefficient	-	0.5 (row 1) - 0.62 (row 2)

In the in 2006 presented SWB Geeraerts, De Rouck et al. (2006), only 1 basic geometry is tested with the above mentioned parameters. In the present paper, we discuss both the brief results of that research and the implementation of a SWB in Oostende based on an engineering, architectural and urban design process.

Results

The overtopping is measured on top of the seaward wall, as shown in Fig. 10. Compared to the reduction of a vertical wall $\gamma_v = 0.93$ or 0.9, as mentioned in the results section of the dike with parapet, a higher reduction with SWB can be expected due to the horizontal distance between the seaward vertical wall and the landward wall where the overtopping is measured. It is found that for non-breaking waves a total reduction

factor γ_{swb} of 0.48 should be included in formula (2). This reduction factor is deducted by dividing 1.97 by 4.08, the exponential coefficients in Fig. 11..

The actual reduction of overtopping discharge also depends on the value of the dimensionless crest freeboard. For $R_c/H_{m0} = 1$, a reduction factor of 8 is obtained. If R_c/H_{m0} increases to 1.5, a dike with SWB is overtopped by 24 times less water compared to a simple dike. Those reduction factors are only valid for the in Table 3 proposed geometry.

The research has also proven that increasing the height of the seaward wall is more effective than increasing the length of the energy dissipating basin.

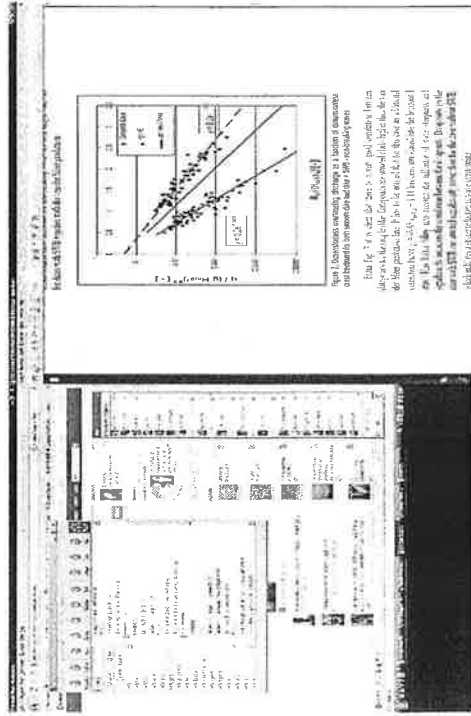


Fig. 11. Dimensionless overtopping discharge as a function of dimensionless crest freeboard for both smooth dike and dike + SWB (non-breaking waves)

Practical use

In 2007, the works started to ameliorate the access to the Oostende harbor and increase the safety towards flooding of the city centre of Oostende, Belgium. The city centre is at about +4.50mTAW (= mean high water level), i.e. about 2.5m lower than the design water level of the 1000 year storm.

Computer simulations have shown that a critical point of the shore protection is the promenade and the area between the planned western breakwater and the existing western jetty (which is a protected monument) This area is directly subjected to waves penetrating through the harbor entrance. The beach profile is rather low, since it has to stay 1m below the underwater dam on the left of the jetty to prevent sediment flow of this sand into the access channel. The construction of a SWB dike at this location perfectly fits into the works at the harbor of Oostende.

Two of the studied variants are to be discussed here: Fig. 12 shows the variant where the SWB follows the historical dike contour. In Fig. 13, the area is extended towards the sea. In this latter variant, the beach in front of the dike is smaller and thus the slope of the beach is steeper, so less wave breaking will occur. The main advantage on the

other hand is the creation of a bigger area, which can be used for popular events in this touristic coastal city.

The critical section of both variants (blue line on Fig. 12 and Fig. 13) have been tested in the wave flume of Flanders Hydraulics Laboratory, and the main results of their behavior is given in Table 4.

If, by application of a stilling wave basin, the overtopping over the landward wall is still above 1l/s.m, a removable storm wall needs to be set up. In the experimental testing, the height of this wall and timing the set up has been tested.

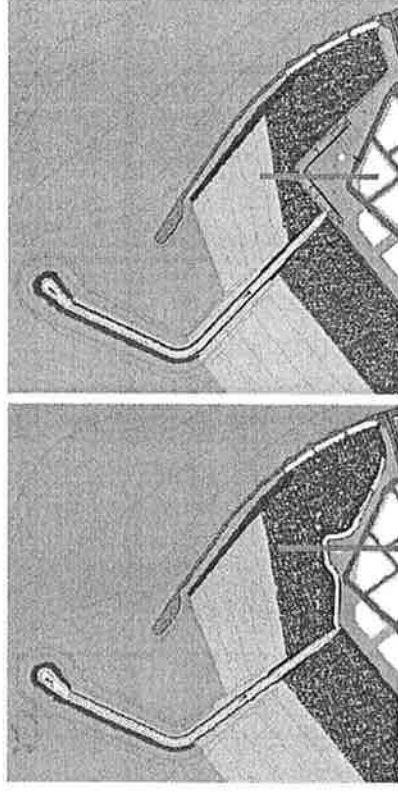


Fig. 12. Variant 1: existing coastline + SWB

Fig. 13. Variant 2: extension to a square + SWB

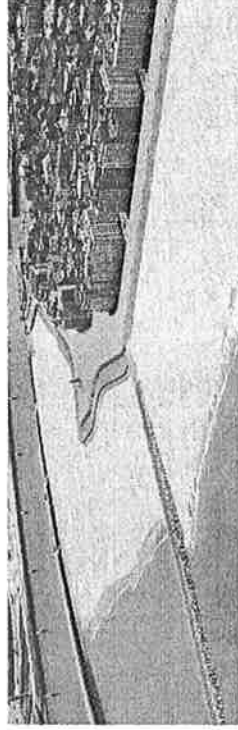


Fig. 14. Artist impression of variant 1: SWB around the existing dike

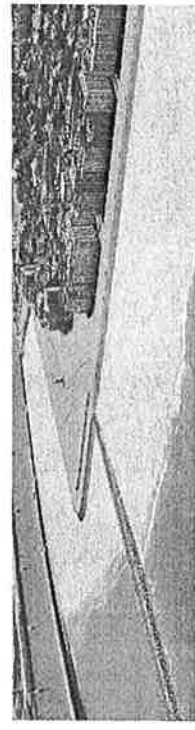


Fig. 15. Artist impression of variant 2: extension of the dike to a square with SWB in front

**CONSEQUENCES OF A DETACHED BREAKWATER ON THE
 MORPHOLOGICAL RESPONSE TO STORMS OF LA BARCELONETA
 BEACH (BARCELONA, SPAIN).**

Amanda Sancho, Jorge Guillén and Elena Ojeda¹

Abstract: This study analyzes the morphodynamic behaviour under storm conditions of La Barceloneta, an artificial embayed beach, previous and after the construction of a detached breakwater using video image measurement. In general, the decreases in the emerged beach area due to storm events were higher after the construction of the detached breakwater. So the detached breakwater built in La Barceloneta beach do not seem to be completely effective in preventing beach erosion during the most energetic storms events.

INTRODUCTION

Many coasts are in erosion as a consequence of a variety of causes (e.g., wave action, maritime constructions interrupting sediment transport, decrease of river inputs, development of coastal areas and massive housing constructions, etc.). Nowadays the most common approach to mitigate beach erosion is the protection of the beach using hard engineering solution (e.g., seawalls, detached breakwaters, groins) soft engineering techniques (beach nourishment), or some combination between them. For instance the detached breakwater in conjunction with beach nourishment can provide an attractive engineering solution to solve erosion problems (Ilic et al., 2005).

The addition of sand to the emerged beach is used to protect the beach or the region behind it, and also to attain a certain beach width for recreational uses (Hanson et al., 2002).

On the other hand, detached or shore-parallel breakwaters are coast-parallel structures built at a certain distance from the shore and totally unconnected to it, protecting a certain shoreline area from wave action (Bricio et al., 2008). Their principal role is the protection of the coast from flooding or erosion although they have also been used to create artificial beaches (Ilic et al., 2005). However, the results obtained after building a detached breakwater have not always been as desired, because it depends on the effect that the detached breakwater has on littoral sediment transport (Bricio et al., 2008).

¹ Instituto de Ciencias del Mar, Marine Geology Department, Passeig Marítim de la Barceloneta 37-49, 08003 - Barcelona (Spain) asancho@icm.csic.es

Table 4. Test results of the SWB in the Oostende project

Variant	waveheight at the dike	overtopping discharge when SWL = +7mTAW	height of storm wall	waterlevel when stormwall needs to be set up	occurrence frequency
1	1.75m	1l/m/s	none	/	/
2	2.75m	45l/m/s	1m	+5.90mTAW	9y

In the environmental impact assessment (EIA), a 3rd and final variant has been proposed with a less seaward extended square. This variant has an overtopping of 1l/m/s (5l/m/s with the expected 30cm sea level rise) and is more flexible to anticipate a future increase of safety level.

CONCLUSIONS

In this paper 2 innovative crest designs with constant crest freeboard have been discussed: the parapet and a stilling wave basin.

It has been shown that a parapet is a very efficient way to reduce wave overtopping, which does not take much place and is easy to construct. A reduction factor $\gamma_{parapet}$ of 0.5 can be added to the formula for non-breaking waves of van der Meer. This maximum values can be obtained by a parapet with an angle β of 45° and the height ratio of the inclined part λ of 0.33. A parapet with this geometrical conditions will be built along the coast in Nieuwpoort, Belgium.

The principle of the 2nd crest design, dike with SWB, has already been proposed at ICCE 2006. A reduction factor γ_{swb} of 0.48 has been extracted from the experimental testing for one specific layout. Two possible designs for the use of a SWB at Oostende and its overtopping reduction have been presented in this paper.

In the near future, further research will be done to formulate $\gamma_{parapet}$ and γ_{swb} as a function of its dimensionless parameters.

ACKNOWLEDGEMENTS

The authors would like to thank ir. Jimmy Geeraerts (Ghent University) and ir. Marc Willems (Flemish Hydraulics Laboratory) for their cooperation in the research of the SWB.

REFERENCES

Frigaard, P. and M. Broersen (1995). "A time-domain method for separating incident and reflected irregular waves." Coastal Engineering 24(3-4): 205-215.
 Geeraerts, J., J. De Rouck, et al. (2006). Reduction of Wave Overtopping at Seadikes: Stilling Wave Basin (SWB). ICCE 2006 30th edition. U. A. o. Engineering. San Diego, California, USA, World Scientific: 5-4680-4691.
 Mansard, E. P. D. and E. R. Funke (1981). The measurement of incident and reflected spectra using a least squares method. ICCE 1980. Sydney, Australia, Am. Soc. Civ. Engrs. 1, New York, U.S.A., Am. Soc. Civ. Engrs., 1981, Part 1, Chapter 8: 154-172.
 TAW, T. A. v. d. W. (2002). Technisch Rapport Golfoploop en Golfoverslag bij Dijken. Delft.
 Troch, P. and J. De Rouck (1999). "An active wave generating-absorbing boundary condition for VOF type numerical model." Coastal Engineering 38(4): 223-247.